


# ŻURAW WIEŻOWY PEINER SK 76


## HYDROMASZ

USŁUGI DZWIHOWE

DIN 15018 H1 / B3  
BGL 2125 0071  
Max. udźwig **5,0 t**

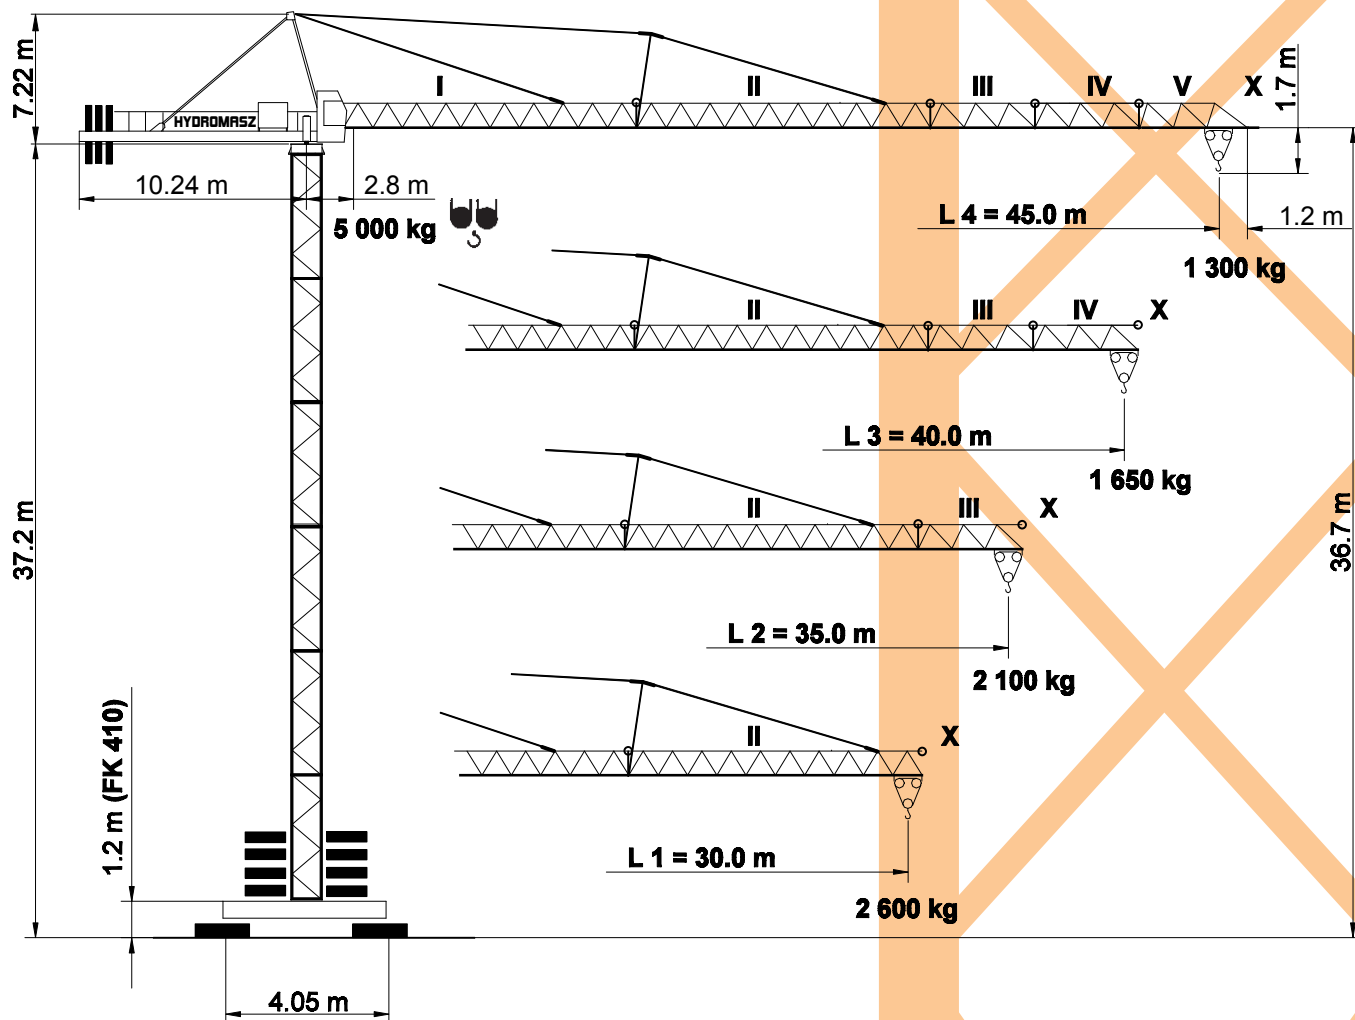

Wysięgnik m	Max. udźwig 5,0 t	Wysięg (m) / udźwig (t)																	
		15	16	18	20	22	24	26	28	30	33	35	38	40	41	42	43	44	45
<b>L4 45,0</b>	2,8 - 14,2 m	4,69	4,36	3,81	3,37	3,02	2,73	2,49	2,29	2,11	1,89	1,76	1,60	1,50	1,46	1,41	1,37	1,34	<b>1,3</b>
<b>L3 40,0</b>	2,8 - 15,3 m	5,0	4,75	4,15	3,68	3,30	2,99	2,73	2,50	2,31	2,07	1,93	1,75	<b>1,65</b>					
<b>L2 35,0</b>	2,8 - 16,4 m	5,0	5,0	4,49	3,99	3,58	3,24	2,96	2,72	2,51	2,25	<b>2,10</b>							
<b>L1 30,0</b>	2,8 - 16,9 m	5,0	5,0	4,65	4,12	3,70	3,35	3,06	2,81	<b>2,60</b>									

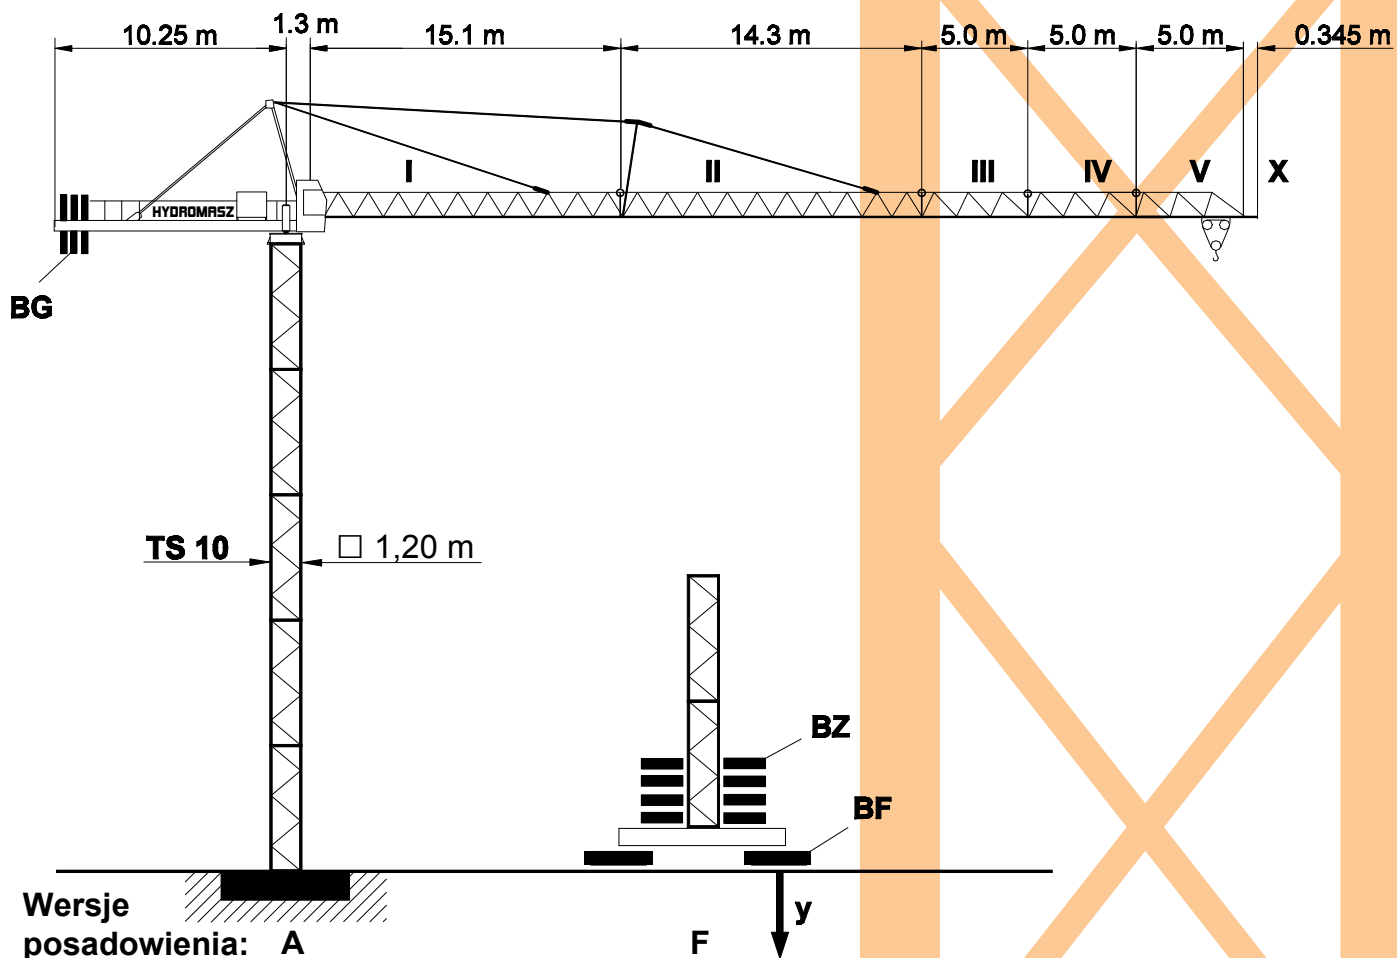

Wersja A			Wersja F					
HK m	Wieża		HK m	Wieża		BZ + BF t	y	
	TS 10.3 6,0 m	TS 10.4 12,0 m		TS 10.3 6,0 m	TS 10.4 12,0 m		i.B. kN	a.B. kN
35,6	6 × TS 10.3	3 × TS 10.4	36,7	6 × TS 10.3	3 × TS 10.4	50,8	363	387
29,6	5 × TS 10.3		30,7	5 × TS 10.3		40,8	320	300
23,6	4 × TS 10.3	2 × TS 10.4	24,7	4 × TS 10.3	2 × TS 10.4	30,8	277	222
17,6	3 × TS 10.3		18,7	3 × TS 10.3		20,8	237	194
11,6	2 × TS 10.3	1 × TS 10.4	12,7	2 × TS 10.3	1 × TS 10.4	20,8	223	191
5,6	1 × TS 10.3		6,7	1 × TS 10.3		20,8	211	188
Płyta fundamentowa 5,0 × 5,0 × 1,2 m			Podstawa krzyżowa FK 410			BF 4 × 2,7 t BZ 5,0 t		

